




INVERTER SYSTEM

ADV200 LC · ADVANCED LIQUID COOLED TECHNOLOGY

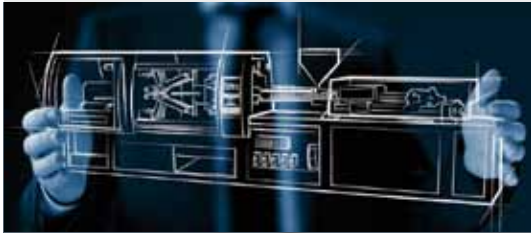

ADV200 LC : a plus in the plastics sector

The ADV200 LC series is used in applications that demand robustness, long life, and maximum reliability.

Liquid cooling systems of electrical and mechanical units, widely used in plastic processing equipment, significantly reduces the size of the electrical drive.

Thanks to a very robust dissipation system, the ADV200 LC series supports the already available air-cooled line and integrates easily in existing systems.

CHARACTERISTICS


- Considerably smaller than an air-cooled inverter
- Water or Oil heatsink with an innovative cooling system
- Excellent corrosion protection with aluminum cooling pipes and internal separation of electronics and cooling liquid
- Revolutionary installation system: drive installs in electrical panel and with external heatsink
- Simple and reliable installation
- Control, operation and programming is identical to air-cooled ADV200 series
- Integrated temperature control function to control external solenoid for drive and liquid-cooled motor
- Use of all options provided for ADV200 series
- Braking resistor installs directly on heatsink (for sizes up to 55kW)
- EMC filter standard for entire series and integrated input choke inductance up to 200kW.

Installation with heatsink in panel or external installation with push-through system



Liquid cooling provides perfect heat dissipation and optimizes the drive in the electrical panel

Wide cooling liquid has temperature range (up to +45°C)



SPECIFICATIONS

AC Power supply	380Vac ... 480Vac, 50/60 Hz, ± 2%
Power Range	30 ... 400kW
Overload	High Duty & Low Duty
Ambient Temperature	0 ... 50°C
Operating water Temperature	0 ... 35°C (45°C with derating / -8°C ... 0°C with 20% Glycol)
Flow Rate	8...40 l/min, depending on drive size
Standards	EN60721-3-3, EN50178, EN61800-5-1, UL508C. Safety integrity level SIL3 according to EN 61508 and EN61800-5-2; PL d according to EN13849-1;
EMC Compatibility:	C3 Category (2nd Amb.) ref. to EN61800-3.
Approvals	CE, (UL, cUL in preparation).


RANGE

Models	Power (kW)													
	30	37	45	55	75	90	110	132	160	200	250	315	355	400
ADV200-4-LC	Size 4			Size 5			Size 6		Size 7		Size 8			

DIMENSIONS



Detail of cooling liquid input:
8...40 l/min (based on drive size).

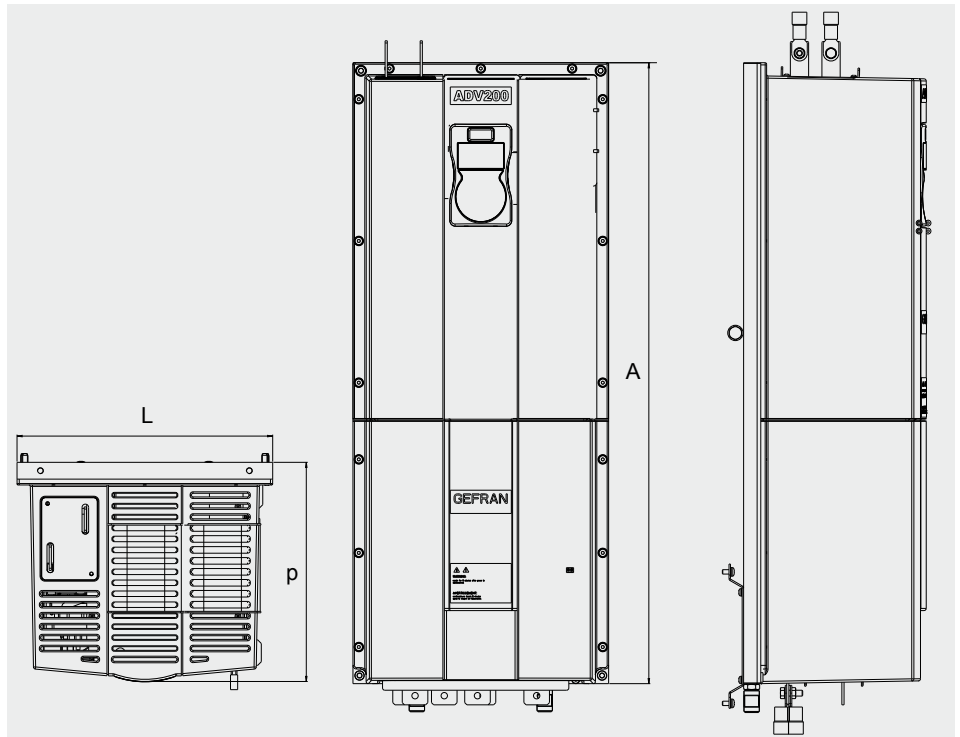

	L Width		A Height		P Depth		Weight	
	(mm)	(inches)	(mm)	(inches)	(mm)	(inches)	(kg)	(lbs)
Size 4	200	7.9	570	22.4	286	11.3	30	66
Size 5	310	12.2	570	22.4	286	11.3	42	92
Size 6	310	12.2	920	36.2	270	10.6	60	132
Size 7	350	13.8	920	36.2	320	12.6	90	198
Size 8	350	13.8	1070	42.1	400	15.8	90	198



Drive & Motion Control Unit
Via Carducci, 24
21040 GERENZANO (VA) ITALY
Ph. +39 02967601
Fax +39 029682653
info.motion@gefran.com

Technical Assistance
technohelp@gefran.com
Customer Service
motioncustomer@gefran.com
Ph. +39 02 96760500
Fax +39 02 96760278



FM 608910

